



PREMIUM
LINE

Downtube 1 battery

DATASHEET

Specifications

Rated voltage
Com. Protocol
BMS
Voltage scope (V)
Charge mode
Operation temperature charge

36 V
RS-485
Smart BMS
31-42V
CC-CV (4 pin Pro-Movec charger)
0°C -45°C

Tests & certifications

IP
Certifications
IP 65
CE / EN 15194
ROHS / REACH
UN 38,3, MSDS

Mounting parameter

Position
Weight (kg)
Controller position
Charger

Downtube
2,6-2,7
Downtube / center
4 pin Pro-Movec charger



Mounting

Downtube **50630 (see frame catalogue)**

Battery options

Part No.	Name	Capacity
50762-BL	DT1	7,8Ah, 36V, 281Wh
50757-BL	DT1	10,4Ah, 36V, 374Wh
50759-BL	DT1	12,8Ah, 36V, 482Wh

DIMENSIONS

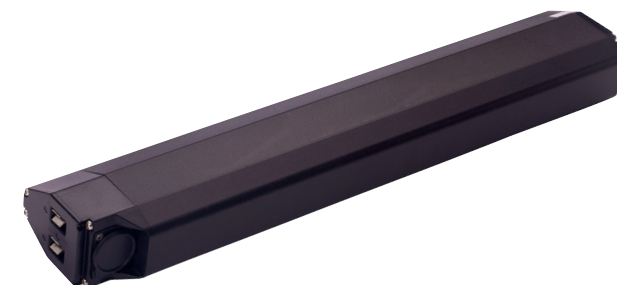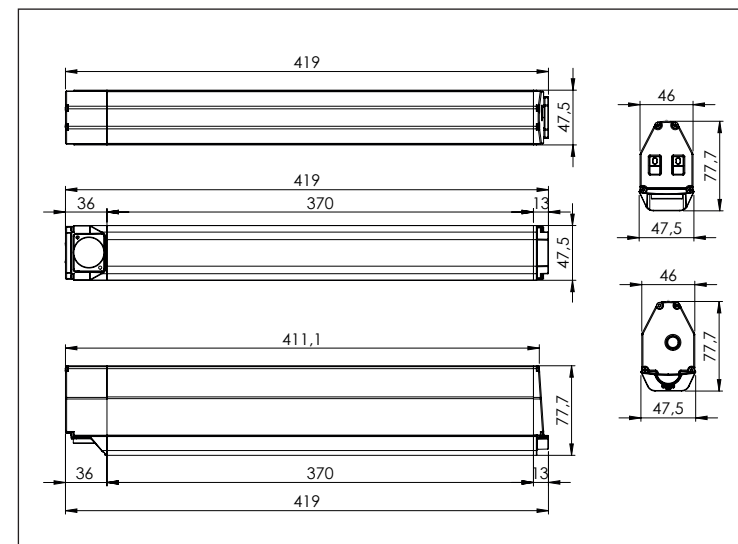

Dec. 2017, VS_1