


P4

Rear motor & downtube-1 battery

28", 36V, LED display & speed sensor + compact

- Superior driving experience
- Reduced noise
- Added functionalities in displays and motors
- Battery capacity 7,8 AH - 13,6 AH*
- Real time information
- EMC tested according to EN15194

VS 1

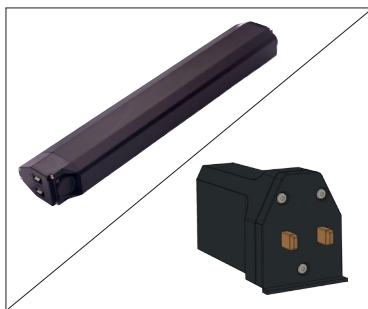

Downtube-1 battery & socket box controller*



Downtube



Minimal display LCD



Rear motor w/free wheel f/discbrake



Speed sensor



Predefined e-kit solutions (60254)

		Part no.
Motor	Rear motor w/freewheel f/discbrake	50609-1-BL
Controller	Socket box, SPEED mode	51102-S04
Sensor	Speed sensor + compact	50960

		Part no.
Display	Minimal display LCD	50707-2
Battery	Downtube-1	

Incl. all necessary parts for mounting.
*Battery not included - various capacities are available.

Options on the next page

P4

Rear motor & downtube-1 battery

28", 36V, LED display & speed sensor + compact

OPTIONS			
Motor	Color - silver	Power motor 1	
Sensor	Hollowtech	Torque sensor *	
Display	Slim display 2 LCD / LED	Center display 3 LCD	5 LED w/walk assist, 4 light
Light	Wire for light	Front lamp + wire	

STANDARD WIRE LENGTHS			
	Extension wire from Controller	Components	Total
Motor wire	1020 mm	220 mm	1240 mm
Light	300 mm		300 mm
Display		800 mm	800 mm
Sensor		750 mm	750 mm




- *Note! When choosing the torque sensor the frame will change.
- Slim display LCD/LED, Center display LCD and Minimal display LED are all available with buttons or throttle.
- This e-kit is also available in ECO mode and for 26" in ECO / SPEED mode.
- For suitable frames see our frame catalog.

Have in mind that non-predefined options are special orders, expect longer delivery time and a minimum quantity.


OPTIONS




Power motor
(50750)



Slim display LCD / LED
(50946 / 50947 w/buttons
50943 / 50944 w/throttle)



Center display LCD
(50935 w/throttle /
50986 w/buttons)

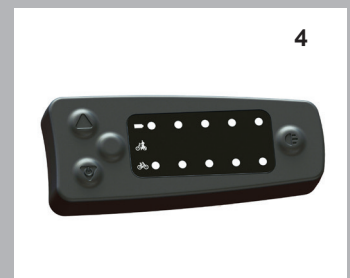

5 LED w/walk assist, light
(50713)